

Mobile App Guide 6





Contents



- What is CHeKT?
- How it works
- End-User Sign Up
- Login into the app
- Navigating the app



What is CHeKT?


The Visual Alarm Monitoring platform developed by CHeKT utilizes on-site Optex Bridge hardware and an advanced cloud-based portal. This platform offers alarm monitoring center agents immediate visual understanding of crucial events through a standardized monitoring interface.

The Bridge, compatible with Onvif compliant camera brands, enables the transmission of video footage to operators and end-users within seconds. The system is capable of integrating camera edge analytics, third-party analytics, and conventional sensors to create a comprehensive video security solution. The CHeKT app provides end-users with event-based video access and site controls, which can be made available by a Professional CHeKT Partner Dealer.

How It Works



SIGNAL PATH

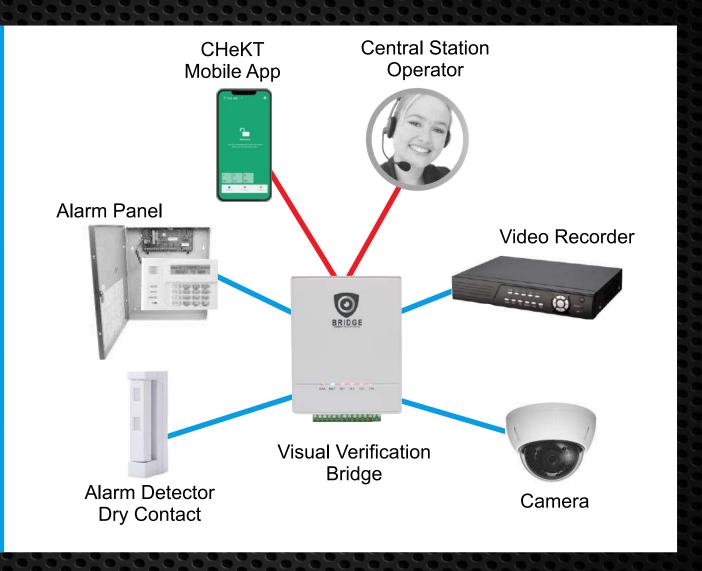



After receiving an email invitation from your dealer, you will be able to access your account site via the app. The email will include important information, including an initial password that you can personalize in later steps.

Your email address will serve as your username, and a direct link to download the app will also be provided.

From: {Security Dealer} via CHeKT <no-reply@chekt.com>

Date: August 25, 2021 at 11:09:33 AM CDT

To: Customer's Email

Subject: Welcome to Member Access for Customer's Account Site

Hello.

{Your Security Dealer} has invited you to join Customer's Account Site

To make the joining process easier we have already created a CHeKT user account for you with automatically generated password.

To complete your initial account registration for member access, click the link below and use the listed username and temporary password shown in this email.

Click to join Your Account Site

[Username]

Customers-Email@email.com

[Password]

hEbepINLvSemYhZPSgg4!aB1





If you have any questions about this process, please contact (Security Dealer).


Professional security services provided by:

{ Security Dealer}.


To access Your Account Site, click on "Click to join Your Account Site" in the email invitation. This will direct you to the login page at auth.checkt.com. To start the registration process, simply copy and paste the password included in the email, and then click on the


"Log In" button.


•

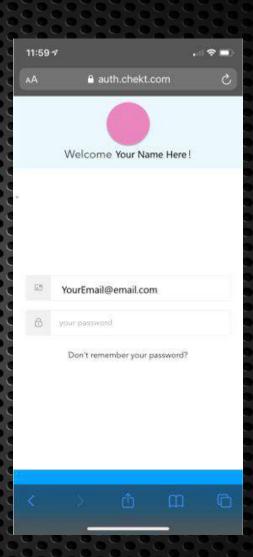

When you log in for the first time, a prompt will automatically appear requesting you to reset your password. It is suggetsed that you create a new password at this time. Clicking the "Request to Reset Password" button will result in another email being sent to you to verify the password change.

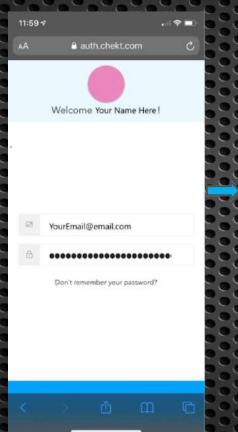


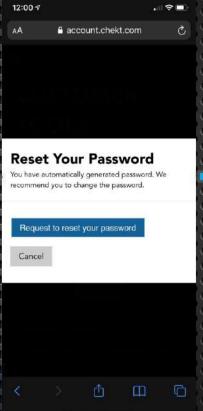


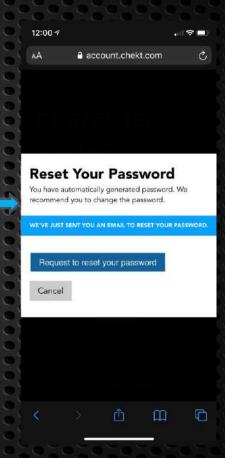

Once you have requested a password reset, you will receive an email with a "Click Here" link to confirm the change. Clicking on the link will redirect you to your browser, where you can reset your password. Once the password reset process is complete, you will be directed to your new profile on chekt.com. You can now log in to your account using the Chekt.com app, which is available on both Android and Apple mobile devices.



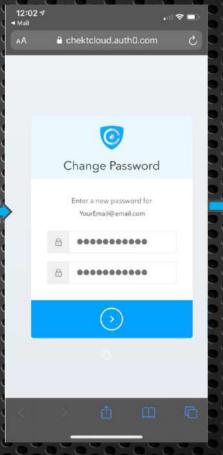

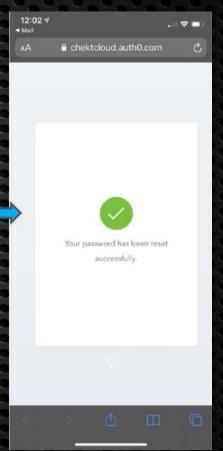






Sign-In To The App

In your mobile device, please find and click to open the Chekt.com App.

Log in using the same credentials from your online profile account.

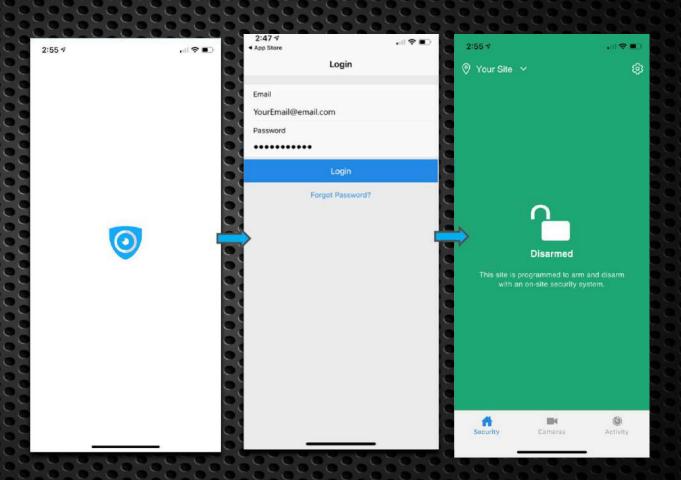

The Name of the selected account site. If you have more than one account, you may click the drop-down list to display all others.

If your Bridge was programmed to be disarmed via the app, You will be able to control by taping the lock icon. In this scenario the Bridge was programmed to follow the arming sequence of an onsite security system.

Your Home Page




App Settings


Relay Control

Live Feed of Cameras


Activity shows the events from the past 30 days

Mobile App Guide

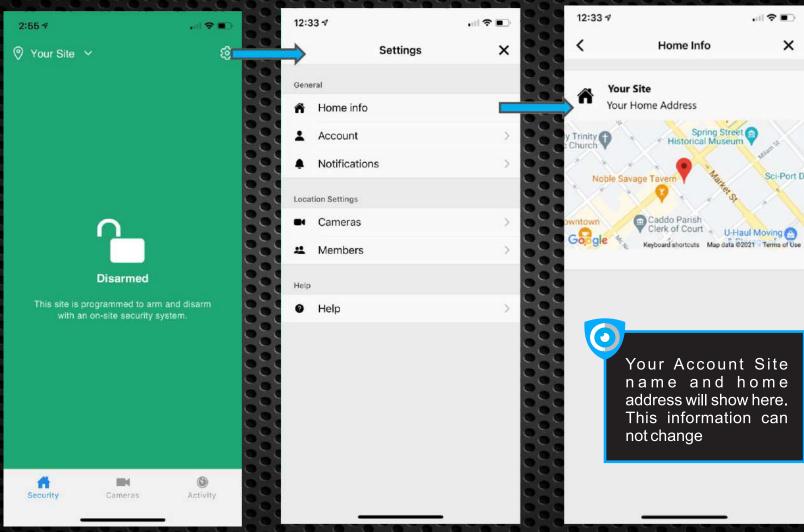


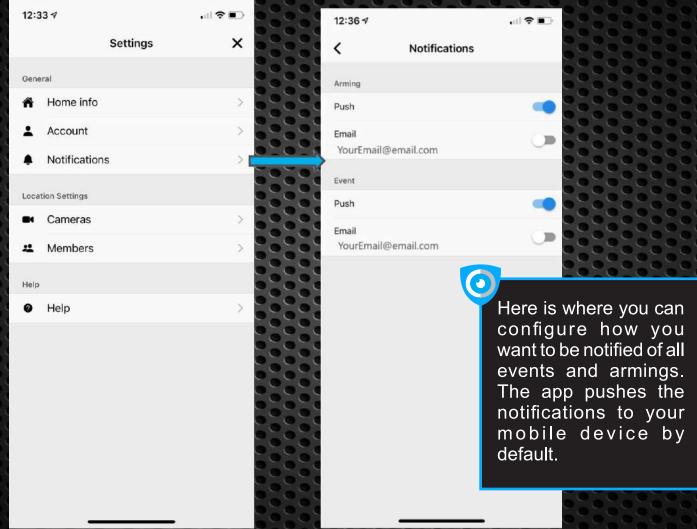

12:34 7

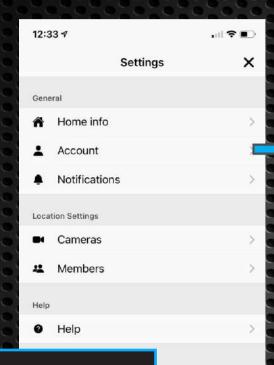



Your app account name, email, and password can be edited - simply follow the instructions to make the changes.

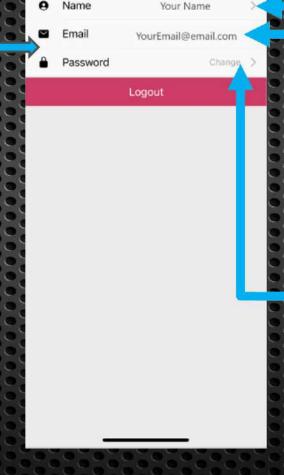



Account


×

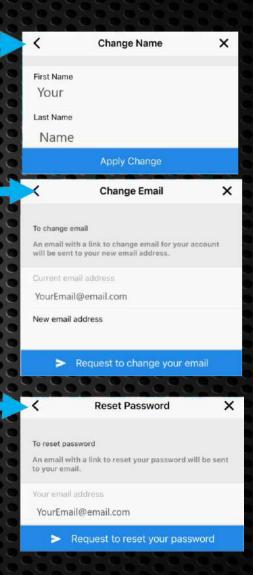

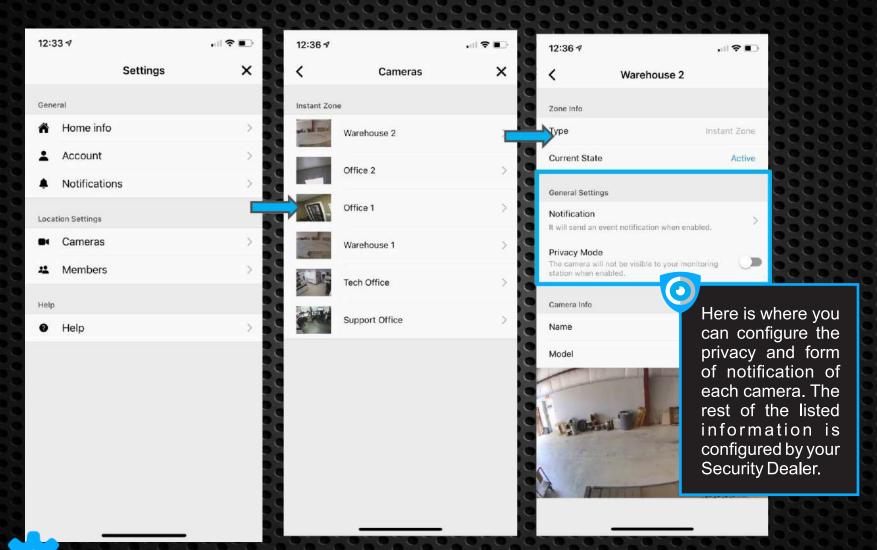

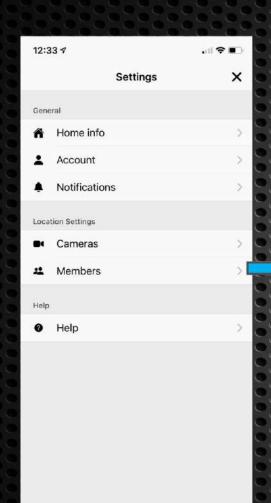




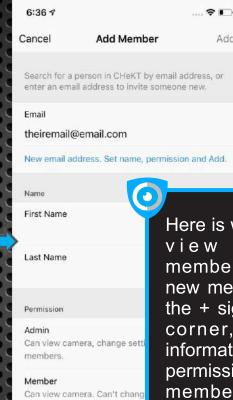



remove members.


Here is where you can view the listed members. To add a new member, click on the + sign at top right corner, fill out the information, select the permission of the new member, and press add at the top right corner.

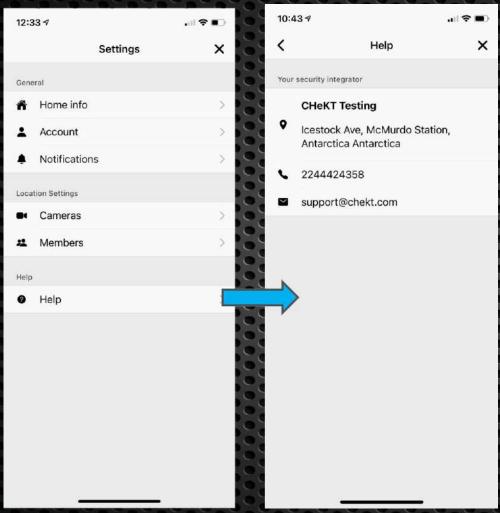


The Help tab contains the contact information of your Security Dealer.

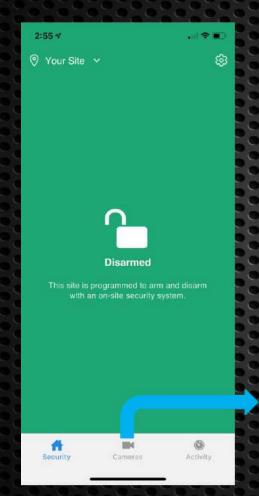

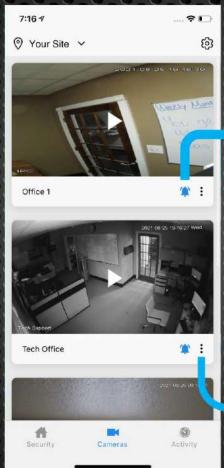





The bell icon allows you to disable notifications from each camera and the option to redirect you to the notification settings which we previously reviewed



The three doted icon gives you the option to redirect you back to settings of the selected camera which we previously reviewed.

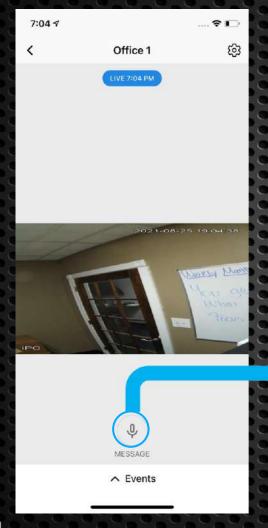


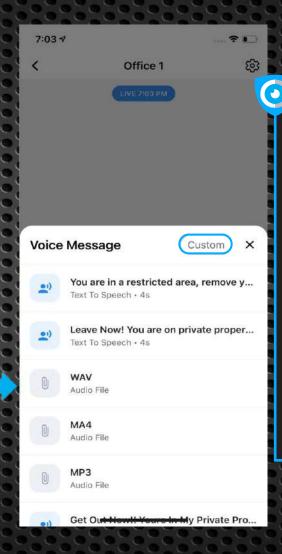

By selecting a single camera from your list, will allow you to utilize the talk down feature.

Simply click the mic icon and select a message from the list and the message will play over your speaker system. All text-to-speech messages and audio files are preset by your Security Dealer, but Live Audio and on demand custom text to speech messages are also available by clicking the custom button at the top right corner.

The Talk-Down feature is an additional service, please contact your Security Dealer for information and requirements.

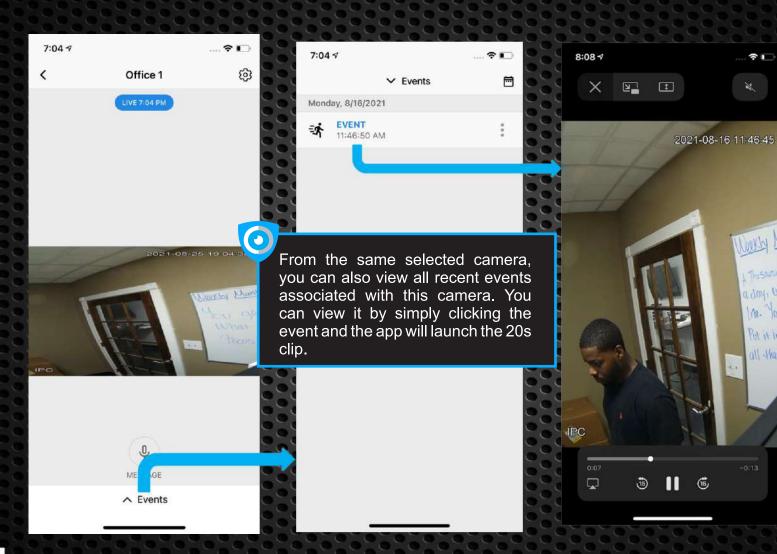



?

Moukly

A2.

Pot it int

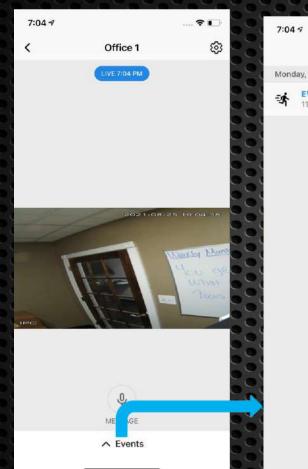

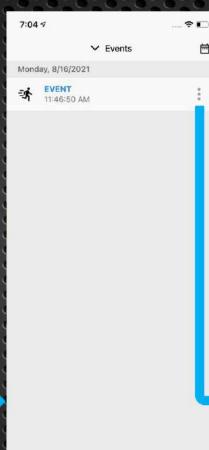





To view all events, of the last 30 days that are associated with this camera, click the calendar icon and choose a day.




Events can be shared from the app by clicking on the three doted icon and choosing the outlet from your mobile options.

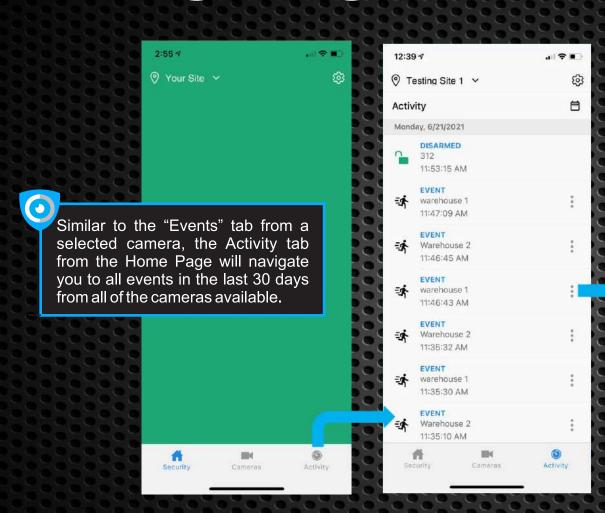

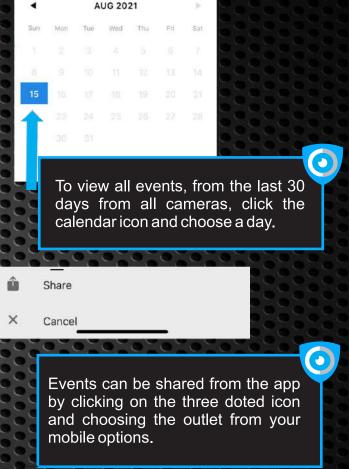



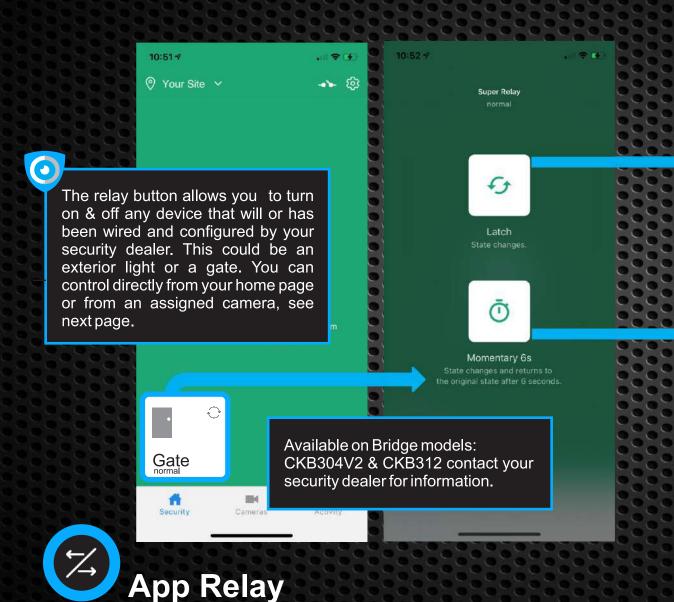




Latch: will energize the relay and hold the relay in a latched state for 6 hours or until turned off.




Momentary: will energize the relay for the amount of time defined by your security dealer, in this scenario it was defined for 6 seconds


Mobile App Guide



If the device being energized by the relay is in view (or enhances) one of the mounted camera's view, your security dealer can assign the relay to it, giving you control directly from the camera in your app. In this scenario we assigned it to Warehouse 1.






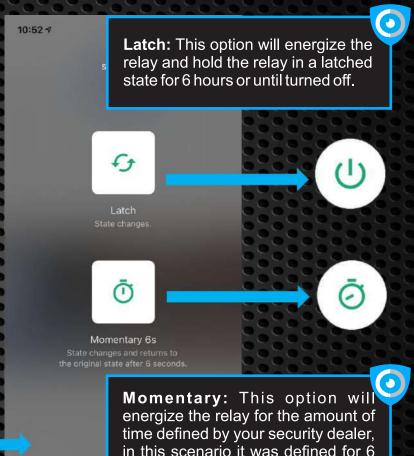

seconds

App Relay

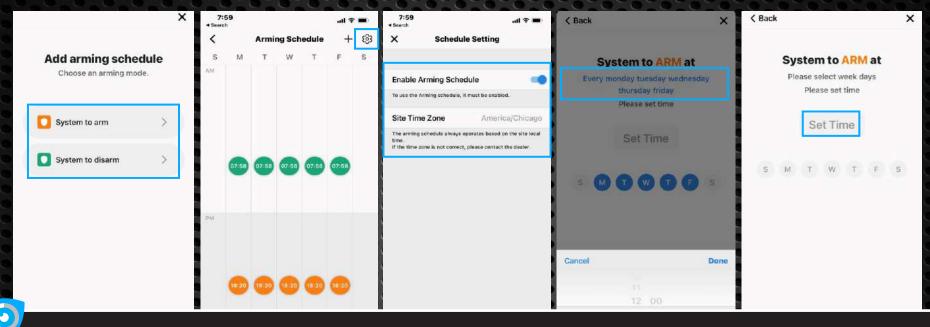

- · The sites in the CHeKT Portal can now be automatically armed based on a preconfigured schedule.
- · The Arming Schedule can be accessed and configured from the CHeKT.com Application.
- · Arm and disarm times can be assigned for individual days or weekends by customizing the schedule for the best possible fit for the customer.
- · Multiple Arm and Disarm instances can be added in a single day.
- · The Arming and Disarming via mobile application option will still be available for situations that fall outside of the normal arming schedule.
- · Alarm Panel Arming is not available when the CHeKT Software Arming method is enabled.





Thank You

For support, please contact your Security Dealer.